



Tel : 011 316 4161
Fax : 011 316 4786

INDUSTRIES(Pty)Ltd


33 Industry Road / PO Box 1200
Clayville Ext 4
Olifantsfontein, 1665



TFM VACUUM TANKER



VACUUM TANKER

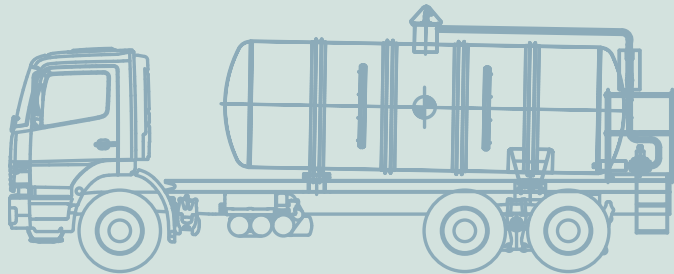

CONSTRUCTION SPECIFICATIONS

Item	Thickness (mm)
Tank Shell	5
Tank Ends	6
Baffles	3
Subframe Longitudinal	100 x 75 x 5 (RSC)
Cradles	5
Attachments	TFM 3point fully flexible mounting

CHASSIS REQUIREMENTS (Typical)

Model	Front Axle Rating (kg)	Rear Axle Rating (kg)	GVM (kg)	WB (mm)	Rear O/H (mm)
2 000 - 3 000	5 500	9 000	14 500	3 000 - 4 000	1 000 - 1 400
3 100 - 7 000	7 500	18 000	26 000	4 000 - 4 500	1 000 - 1 400
7 100 - 10 000	7 500	18 000	26 000	4 000 - 4 500	1 500 - 2 000

HYDRAULIC DRIVE

	B25	B35	B50
Hydraulic Pump	PZB (Gear)	PZB (Gear)	PZB (Gear)
Hydraulic Motor	Salami	Salami	Salami
	38 ℓ / minute	65 ℓ / minute	65 - 84 ℓ / minute

EXHAUSTER SPECIFICATIONS

Make	Tank Capacity	Exhaust Model	Snifter Material	Vacuum
Broom or equivalent	2 000 - 3 000	B25	2	1
	3 100 - 7 000	B35	Stainless	65%
	7 100 - 10 000	B50	415	

BODY SPECIFICATIONS

Capacity	Travelling Height (mm)	Tank Length (mm)	Body Width (mm)	Body Height (mm)	Mass (kg)
2 000 - 3 000	2 600 - 3 100	2 000 - 3 000	1 800 - 2 000	900 - 1 000	1 850
3 001 - 7 000	3 200 - 3 500	3 000 - 3 800	1 800 - 2 000	900 - 1 000	2 200
7 001 - 10 000	3 200 - 3 500	3 800 - 4 200	1 800 - 2 000	900 - 1 000	2 300

General

- ◆ The specifications as shown are only guidelines.
- ◆ To determine the optimum configuration a detailed mass distribution should be done.
- ◆ Specific chassis and body configuration must be taken in consideration.
- ◆ Vehicle to be fitted with a RQV governor.

Contacts

- Allan Pletschke : 082 450 2258
- Mark Jacobs : 082 461 7762
- Ryan van Zyl : 082 450 2256
- Pieter Ackermann : 082 891 5962

